DATASENSING
easing automation challenges

M18 IP67 WEBSITE

S5 / SL5 ST

M18 TUBULAR SINGLE BEAM INFRARED AND LASER SAFETY SENSORS



Photoelectric tubular M18 safety sensor to be used in combination with safety units SG-BWS

- Emitter-receiver photocells with test input
- Visible red class 1 laser emission (SL5) or infrared LED emission (S5)

- Type 2 and Type 4 models
- Plastic M18 tubular format
- Up to 40m operating distance
- Standard M12 connectors

CE UKCA cULus

SAFETY TYPE 2 SAFETY TYPE 4

CODE DESCRIPTION

S5 - 5 - G8-62 - SG - ST2

series	**S5**	M18 Photoelectric infrared sensor
	SL5	M18 Laser infrared sensor
supply type	**5**	10...30 Vdc
function	**G8-62**	Infrared emitter
	F8-92	Infrared receiver
	G-82	Laser emitter
	F-92	Laser receiver
safety connectivity	**SG**	to be used with SG-BWS safety unit
type	**ST2**	type 2
	ST4	type 4

TECHNICAL SPECIFICATIONS

	S5-5-*-*8-**-ST*
	SAFETY TYPE 2 / SAFETY TYPE 4
GENERAL DATA	
Operating principle	Emitter, Receiver
Control units to be used	SG-BWS-T4 Series
DETECTION CAPABILITIES	
Nominal sensing distance	0 ... 8 m
Controlled height	Single-beam
EMISSION DATA	
Emission	LED Infrared
Effective beam angle	≤ ±2.5 ° (S5-5-*8-**-SG-ST4), ≤ ±5 ° (S5-5-*8-**-SG-ST2)
SAFETY PARAMETERS	
Type	2 (S5-5-*8-*2-SG-ST2), 4 (S5-5-*8-*2-SG-ST4)
INPUT/OUTPUT	
Response time	1 ms
Output type	PNP
Output function	To be connected to SG-BWS-T4 Safety Control Unit Series
HMI/UI	
LED indicators	Green (Power ON)
ELECTRICAL DATA	
Supply voltage	24 Vdc ±15%
Maximum No-load absorption	30mA
Maximum DC load current	100 mA
Insulation resistance	>20 MΩ 500 Vdc, between electronics and housing
Ground resistivity	500 Vac 1 min., between electronics and housing
MECHANICAL DATA	
Dimensions	M18x1 / L=73.5 mm
Housing material	PBT / PMMA
Active part material	PMMA
CERTIFICATIONS	
Shocks	16 ms (10 G) 1,000 shocks per axis (EN 60068-2-29)
Vibrations	Width 0.35 mm, frequency 10 ... 55Hz; 20 sweep per axis, 1octave/min (EN 60068-2-6)
ENVIRONMENTAL DATA	
Operating Temperature	-25 ... 55 °C (Without freeze)
Mechanical Protection	IP67
Storage temperature max.	-25 ... 70 °C
Shocks and vibrations	IEC60068-2-6
Ambient light immunity	according to EN 60947-5-2 : 2020

TECHNICAL SPECIFICATIONS


	SL5-5-*-**-SG-ST*
	 
GENERAL DATA	
Operating principle	Emitter, Receiver
Control units to be used	SG-BWS-T4 Series
DETECTION CAPABILITIES	
Nominal sensing distance	0 ... 40 m
Controlled height	Single-beam
EMISSION DATA	
Emission	LASER Red
Effective beam angle	≤ ±2.5 ° (SL5-5-*-**-SG-ST4)
SAFETY PARAMETERS	
Type	4 (SL5-5-*-*2-SG-ST4)
INPUT/OUTPUT	
Response time	1 ms
Output type	PNP
Output function	To be connected to SG-BWS-T4 Safety Control Unit Series
HMI/UI	
LED indicators	Green (Power ON)
ELECTRICAL DATA	
Supply voltage	24 Vdc ±15%
Maximum No-load absorption	35mA
Maximum DC load current	100 mA
Insulation resistance	>20 MΩ 500 Vdc, between electronics and housing
Ground resistivity	500 Vac 1 min., between electronics and housing
MECHANICAL DATA	
Dimensions	M18x1 / L=86 mm
Housing material	ABS / PMMA
Active part material	PMMA
CERTIFICATIONS	
Shocks	16 ms (10 G) 1,000 shocks per axis (EN 60068-2-29)
Vibrations	Width 0.35 mm, frequency 10 ... 55Hz; 20 sweep per axis, 1octave/min (EN 60068-2-6)
ENVIRONMENTAL DATA	
Operating Temperature	-10 ... 50 °C (Without freeze)
Mechanical Protection	IP67
Storage temperature max.	-25 ... 70 °C
Shocks and vibrations	IEC60068-2-6
Ambient light immunity	according to EN 60947-5-2 : 2020

AVAILABLE MODELS

Emission	Type	e_prodotto_distanza_di_rilevazione_nominale	Housing material	Operating principle	Model
LED Infrared	2	0 ... 8 m	PBT / PMMA	Emitter	**S5-5-G8-62-SG-ST2** (952051870)
n/a				Receiver	**S5-5-F8-92-SG-ST2** (952051890)
LED Infrared	4			Emitter	**S5-5-G8-62-SG-ST4** (952051910)
n/a				Receiver	**S5-5-F8-92-SG-ST4** (952051930)
LASER Red		0 ... 40 m	ABS / PMMA	Emitter	**SL5-5-G-82-SG-ST4** (952501160)
n/a				Receiver	**SL5-5-F-92-SG-ST4** (952501170)

CONNECTIONS


S*5-G*-*2-SG-ST*
(Emitter)



MALE M12
4 pins Safety Single Beam Emitter

1	Brown	24 Vdc
2	White	NOT USED
3	Blue	0 V
4	Black	Test

S*5-5-F-92-SG-ST*
(Receiver)




MALE M12 4 pins Safety Single Beam Receiver

1	Brown	24 Vdc
2	White	NOT USED
3	Blue	0 V
4	Black	PNP 100 mA

MECHANICAL DRAWINGS


S5-5-G8-62-SG-ST2

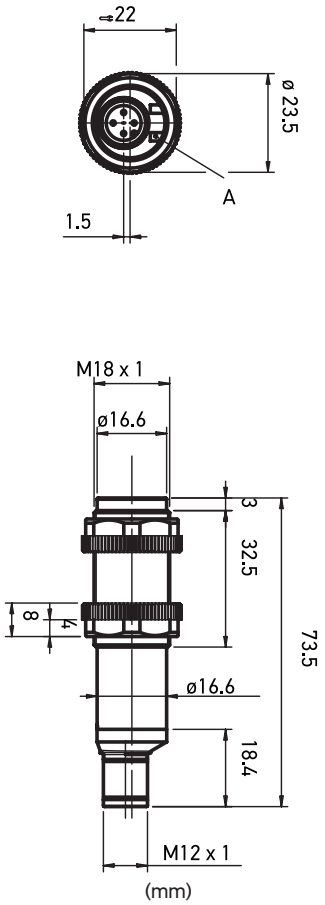

(mm)

Model	A
S5-5-G8-62-SG-ST2	LED power on

S5-5-F8-92-SG-ST2

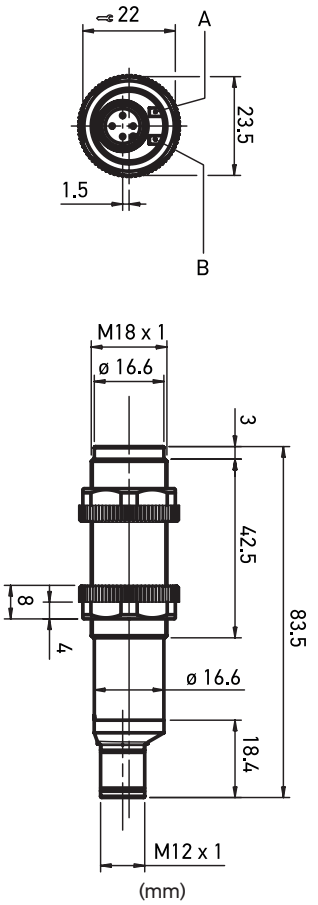


(mm)

Model	A	B
S5-5-F8-92-SG-ST2	LED stability	LED power on

MECHANICAL DRAWINGS


S5-5-G8-62-SG-ST4

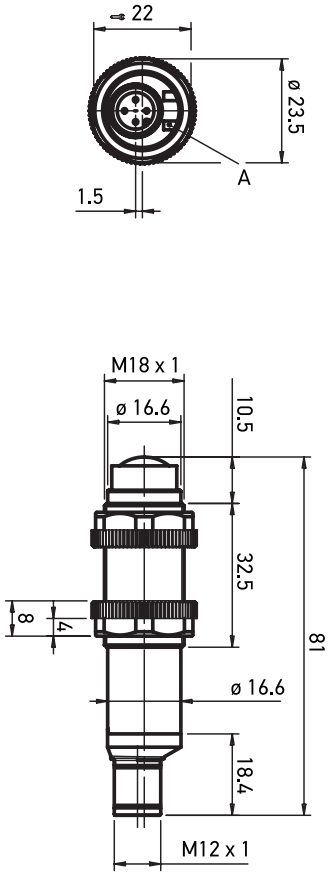

(mm)

Model	A
S5-5-F8-92-SG-ST4	LED power on

S5-5-F8-92-SG-ST4

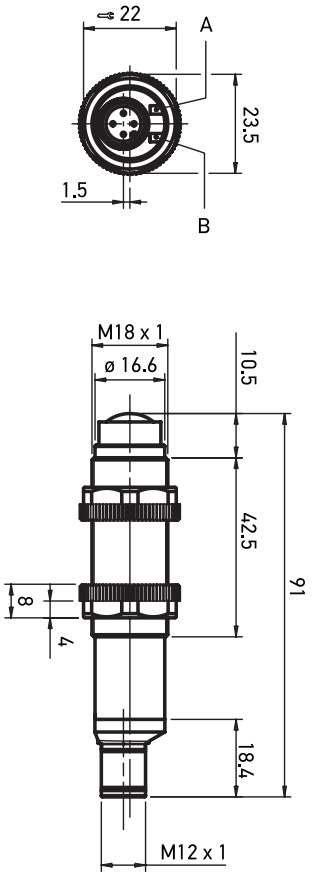


(mm)

Model	A	B
S5-5-F8-92-SG-ST4	LED stability	LED power on


MECHANICAL DRAWINGS

SL5-5-G-82-SG-ST4

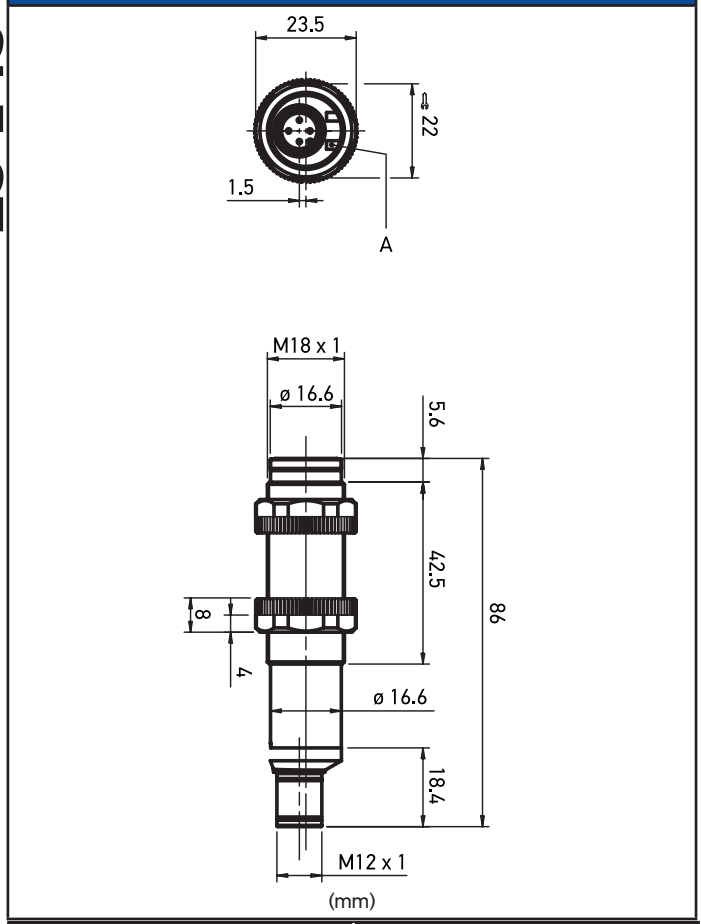

Model	A
SL5-5-G-82-SG-ST4	LED power on

SL5-5-F-92-SG-ST4

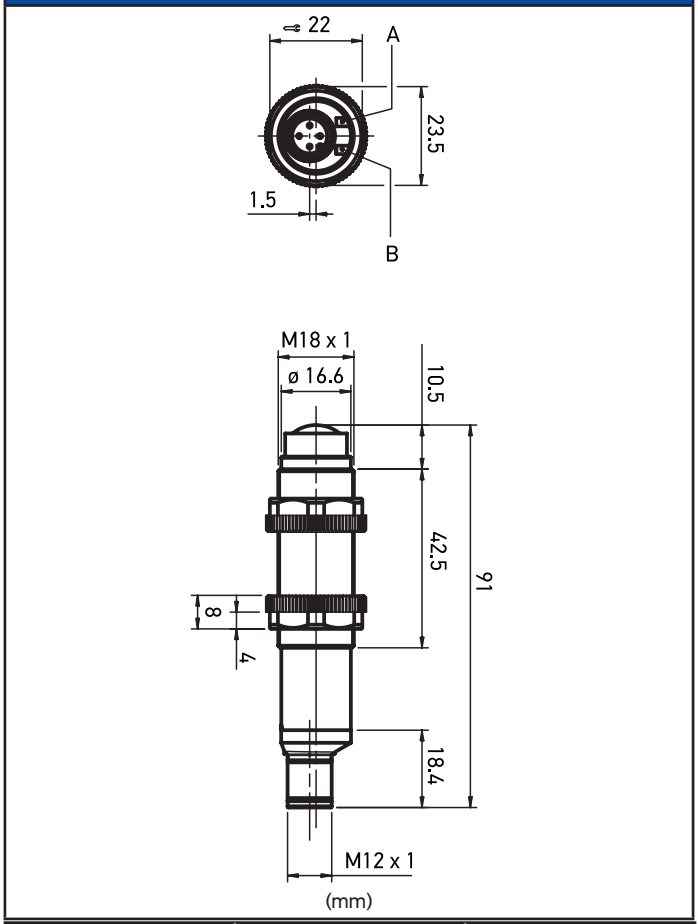

Model	A	B
SL5-5-F-92-SG-ST4	LED stability	LED power on

ACCESSORIES TO BE ORDERED SEPARATELY

	Model	Description	Article code
Cables	CS-A1-02-U-03	Cable M12 4 poles axial female unshielded 3m UL 2464	95ASE1120
	CS-A1-02-U-05	Cable M12 4 poles axial female unshielded 5m UL 2464	95ASE1130
	CS-A1-02-U-10	Cable M12 4 poles axial female unshielded 10m UL 2464	95ASE1140
	CS-A1-02-U-15	Cable M12 4 poles axial female unshielded 15m UL 2464	95ASE1150
	CS-A1-02-U-25	Cable M12 4 poles axial female unshielded 25m UL 2464	95ASE1160
Mounting brackets	SP-40	SP-40 = Tubolar mounting bracket	95ACC1370
	ST 18-C	Bracket M18 90*	ST 18-C
	MICRO-18	MICRO-18 = M18 support with micrometric regulation for tubular M18 sensors	95ACC1380
	SWING-18	SWING-18 = adjustable support for M18 tubular sensors	895000006

The company endeavors to continuously improve and renew its products; for this reason the technical data and contents of this catalogue may undergo variations without prior notice. For correct installation and use, the company can guarantee only the data indicated in the instruction manual supplied with the products. Product and Company names and logos referenced may be either trademarks or registered trademarks of their respective companies. We reserve the right to make modifications and improvements.

Revision number: 1 - Revision date: 2025-03-17